Raw material	PA66、COPPER SILVER PLATIING、SILICONE
CERTIFICATION	CQC/REACH/TUV/RoHS/CE
Flame-resistant rating	UL94 V-0
Level of protection	IP68
Voltage rating/Current rating	450V/24A
Withstanding voltage	2500V
Cable gague	0.5mm²~2.5mm²
Operating temperature	-40°C~+105°C

3 Pin

Rubbers Diameter	Outer Cable Diameter
ø12mm	ø9-12mm
ø9mm	ø5-9mm

Rubbers Diameter

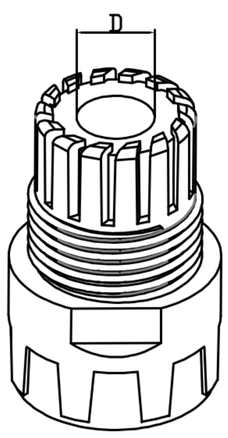





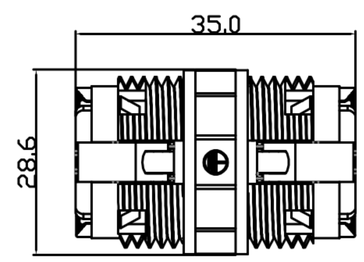

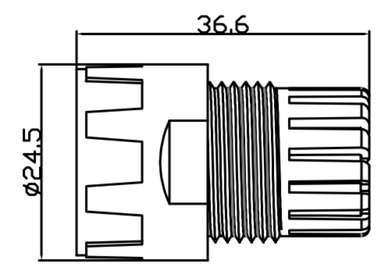



Weight	MEAS	Each carton number	G.W.
28g	35x32.5x36.2cm	360pcs	11.5kg

TOLERANCE UNSPECIFIED	
X. ±0.35 X.XX ±0.10 X.XX±0.20 X.XXX±0.05	X.° ±3° X.X° ±2° X.XX°±1°

UNIT	mm	John XU QIANJUN/2025.08.6	PART NO	HF-P20-3PIN
SCALE	1:1		DWG NO	HF-P20-3PIN
SHEET	1/1		TITLE	HF-P20-3P_WATERROOF_CONNECTOR